



GEMINI 1X1 SOFT


RGBWW LED Panel

Compact cinematic soft lighting

Unleash your creative vision and bring high-quality cinematic lighting to your set with the compact and lightweight Gemini 1x1 Soft. Control light precisely from a beautiful soft white light to full saturated RGBWW control in an instant; Gemini delivers the ultimate flexibility you need for endless creative lighting options. Whether in the studio or out on location, the user-friendly quick-to-rig Gemini 1x1 could be the only panel you'll ever need.



- Front area dimension: 12.6"x12.6"
- 95° Beam angle, 157° Field angle
- Lux at 10ft/3m: 614 (Daylight), 557 (Tungsten)
- Color temperature range 2,700-10,000K.
- Outstanding color accuracy, CRI: 97, TLCI: 94
- Full RGBWW color gamut mixing
- Hue, Saturation and intensity control
- Full plus/minus green color correction
- 0-100% automatic flicker-free dimming at any frame rate or shutter angle
- Wired or wireless DMX & Bluetooth remote control options
- Multi-voltage 100-240VAC; DC Input 13-28VDC
- Optional mobile battery power with 100% intensity output
- Weight: 11.7 lbs (5.3 kg)

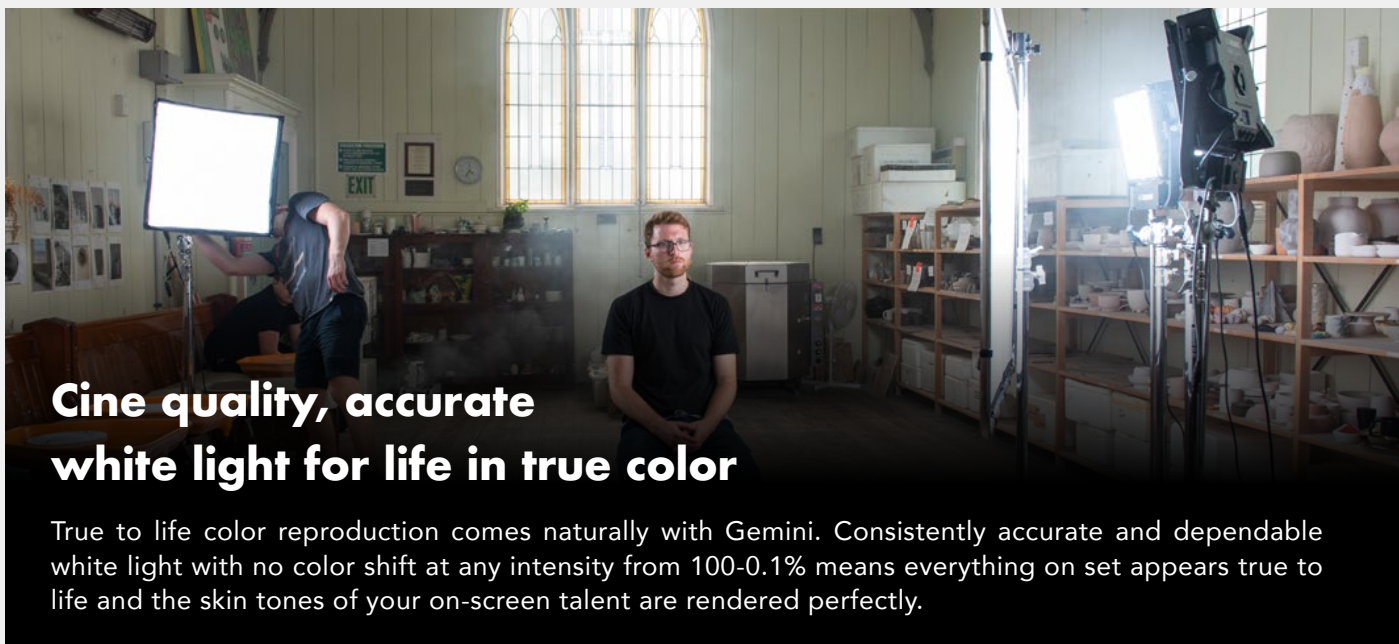

Cine quality, accurate white light for life in true color

True to life color reproduction comes naturally with Gemini. Consistently accurate and dependable white light with no color shift at any intensity from 100-0.1% means everything on set appears true to life and the skin tones of your on-screen talent are rendered perfectly.


Full RGB control for endless creativity

One light, infinite creativity. With precision control over 16.7 million colors and a wide range of gels and fully customizable cinematic effects, Gemini is the only fixture you will need on set. From simulating fire or a television, washing a green screen or matching a color palette, Gemini's beautifully rich color output with outstanding depth, vibrancy and intensity means that whatever the situation the light you need is already on set and just the touch of a button away.



Flicker-free output at any level

Fixing flicker in post is a thing of the past with Gemini. With advanced LED control to create exceptionally stable and flicker-free light at any shutter angle, frame rate or at any intensity level from 100 – 0.1% you can spend more time shooting and less time in the edit suite.

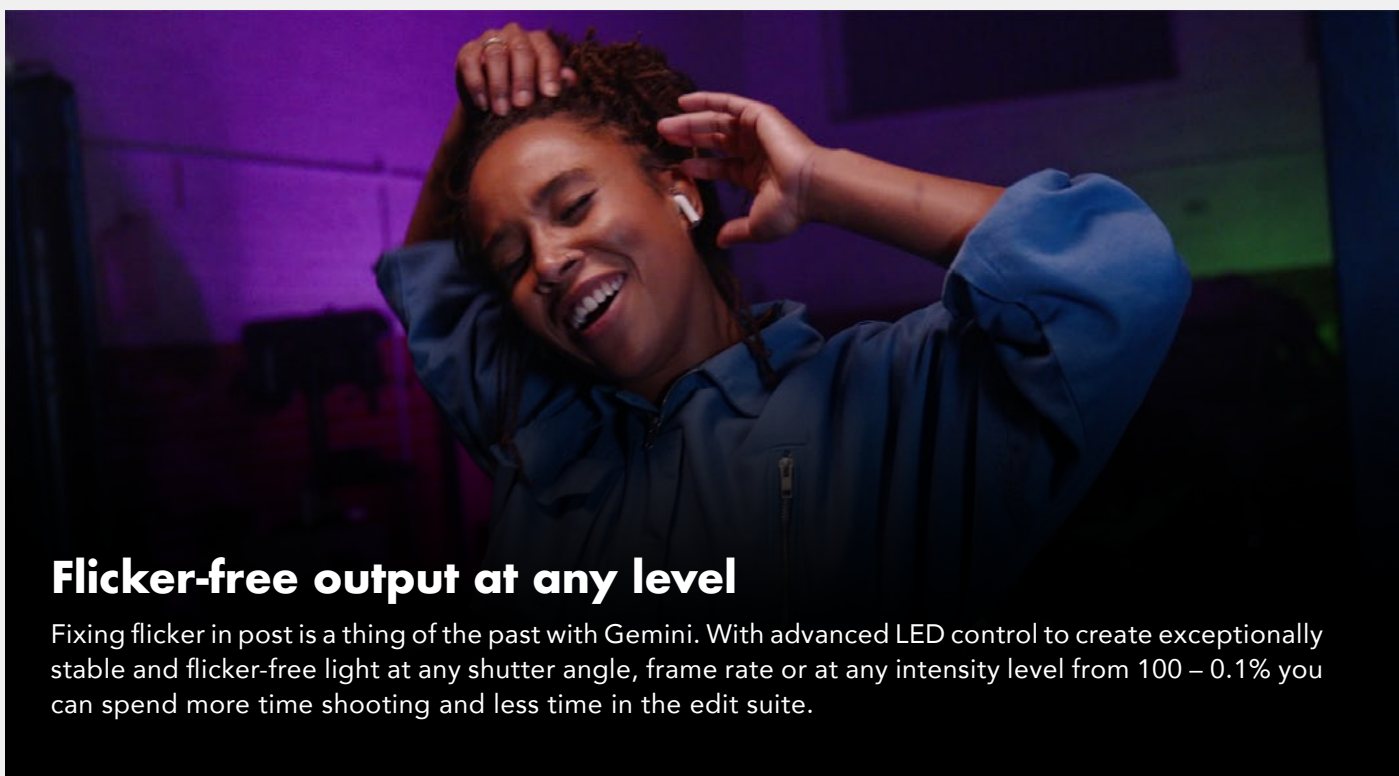

Simple to use

With an intuitive UI for fast menu selection and customizable pre-set buttons for quick recall of your favorite scenes and settings, Gemini makes professional results available at the touch of a button, helping you operate with efficiency and save time on set.




Lightweight and agile for rapid rigging


Ready to work right out of the box with no assembly required, Gemini is ready to start work immediately. Weighing in at just 5.3kg Gemini is easy to transport and quick to rig or move around your set, use lightweight lighting supports or even hand hold for ultimate lighting versatility. The adjustable onboard power supply mount means that Gemini can be perfectly balanced and positioned quickly to be ready for action.

Battery power for cine lighting anywhere


For maximum flexibility to take cine quality lighting anywhere, Gemini can be powered at full intensity for over two hours with batteries such as the Anton/Bauer DIONIC 26V. Quickly mount 13-28V DC batteries with optional V-Mount or Gold-Mount battery plates to place your lighting anywhere your creativity takes you.

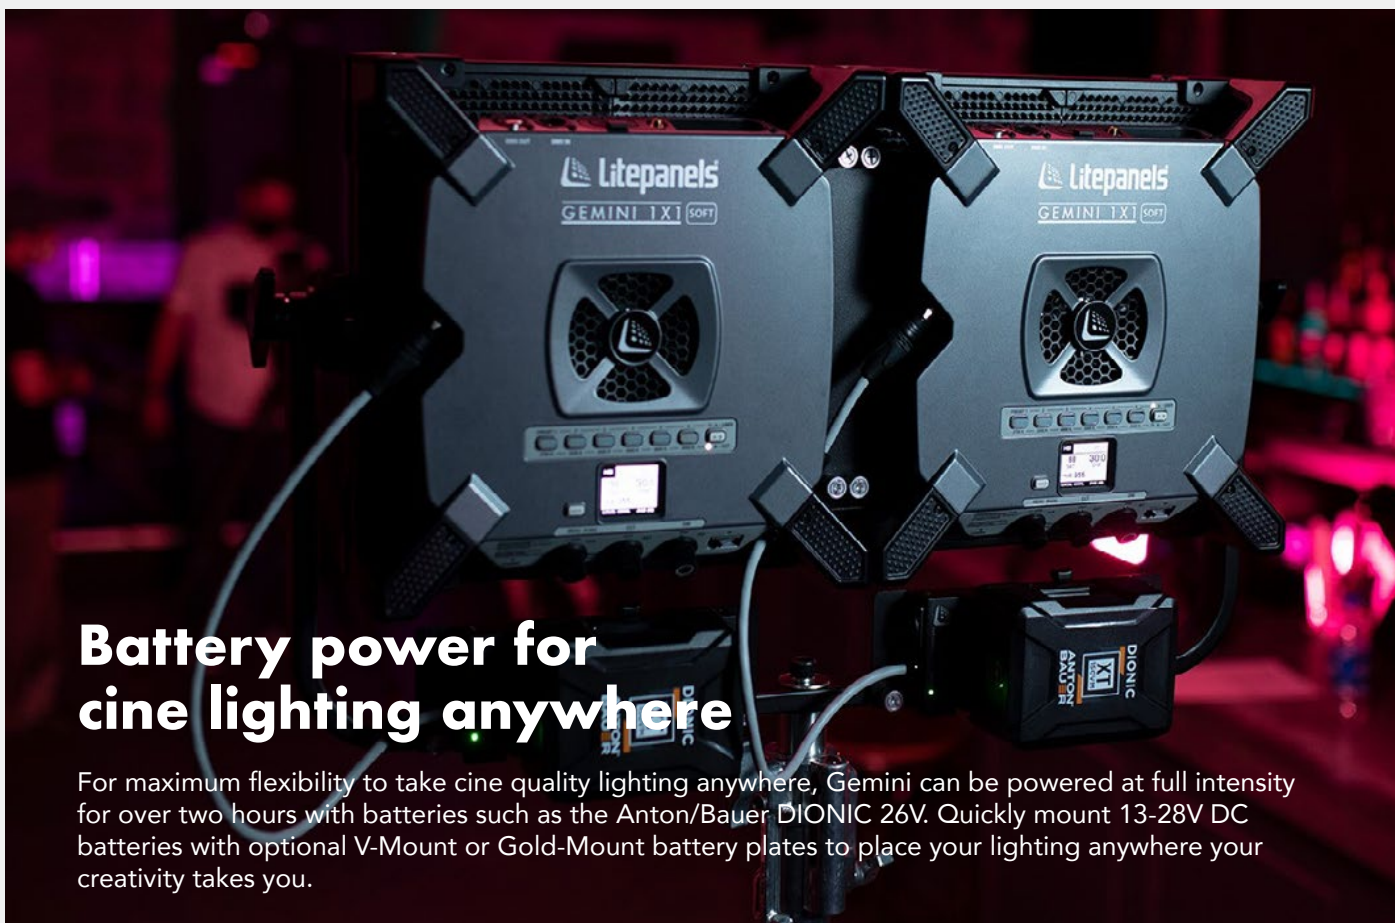


Daylight 5600K

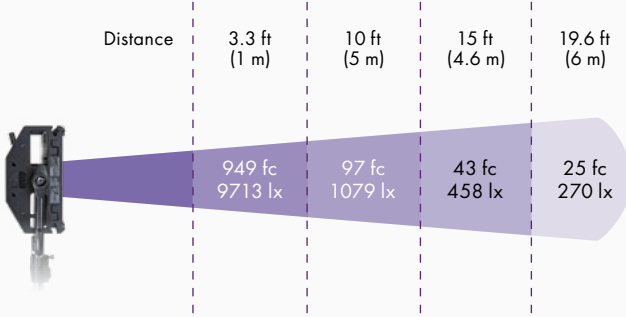


Tungsten 3200K

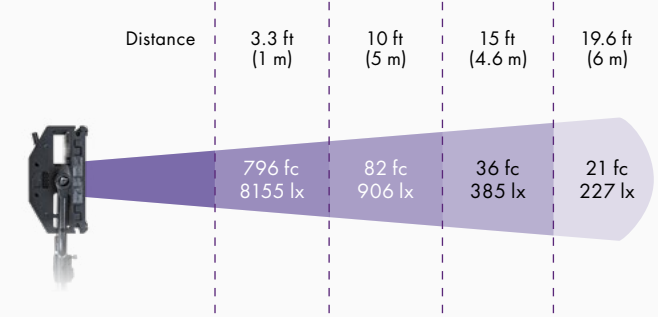


CRI 5600K

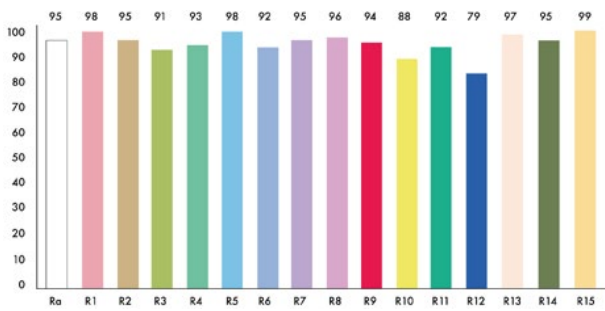


CRI 3200K

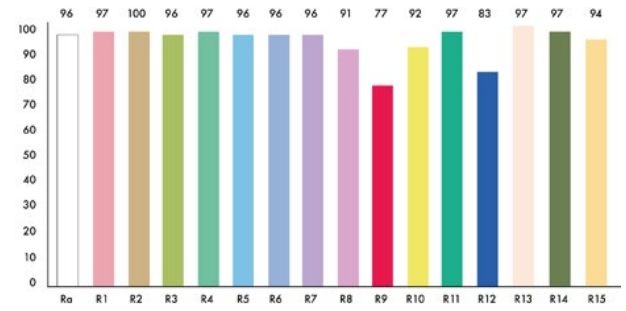


Spectrum

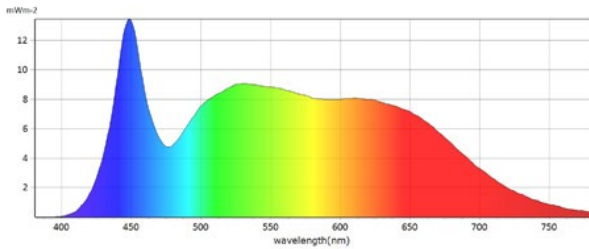


Spectrum

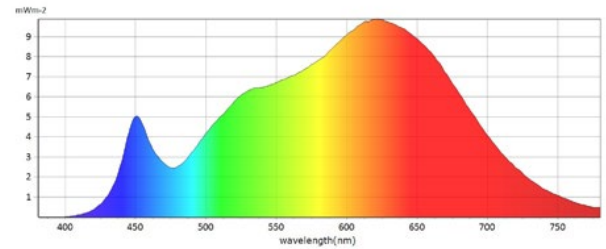

General Color Rendition

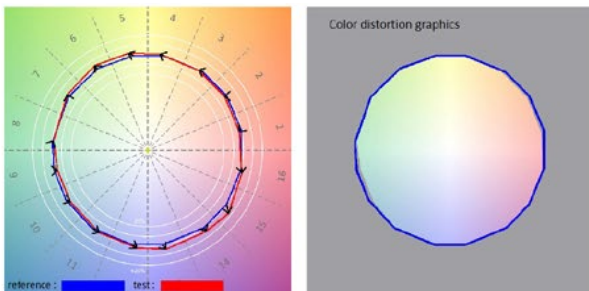

General Color Rendition

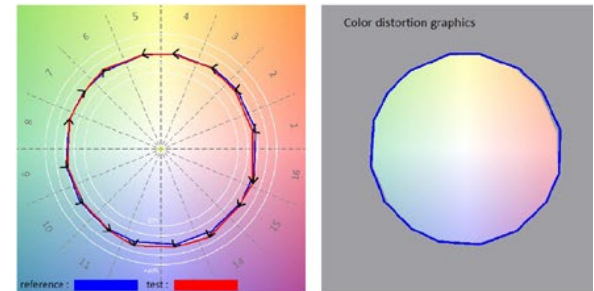

PART NUMBERS	EU	UK	US	Bare Ends
Standard Yoke	945-1101	945-1201	945-1301	945-1401
Pole Operated	945-1111	945-1211	945-1311	945-1411

Optical

- **LED Panel:** RGBWW
- **Beam angle:** 95°
- **CCT Range:** 2,700-10,000K
- **Daylight (5600K) (Lux @10ft/3m):** 614
- **Tungsten (3200K) (Lux @10ft/3m):** 557
- **RED (Lux @10ft/3m):** 74
- **GREEN (Lux @10ft/3m):** 177
- **BLUE (Lux @10ft/3m):** 34
- **CRI (average):** 97
- **TLCI (average):** 94
- **+/- Green-Magenta Adjustment:** Continuously Variable
- **Included Diffusion:** Fixed

Operational

- **Lighting Control Modes:** RGBWW/CCT/HSI/Gel/FX/XY
- **Number of Gels:** 300
- **Number of Effects:** 11
- **Dimming Control:** Constant Current 0-100% Continuous
- **Remote Control Options:** DMX, RDM, Apollo CRMX*, WDMX*, Bluetooth*
- **Fan Control:** Yes
- **USB Updates:** Yes
- **Ambient Temp Operation:** -20 to +45°C / -4 to +113°F
- **Estimated LED lifetime:** 50,000+ hrs
- **Preset Options:** 6x preset CCT modes with quick select buttons
6x customisable user presets with quick select buttons

* Requires optional dongle

Mechanical


- **Versions:** Manual, pole operated
- **Weight*:** Manual: 11.7 lb / 5.3 kg
Pole Operated: 16 lb / 7.6 kg
- **Height:** 12.6" / 320 mm
- **Width:** 12.6" / 320 mm
- **Depth:** 4.6" / 118 mm
- **Mounting method:** TVMP

* Including yoke and power supply

Electrical

- **Nominal power draw:** 200W
- **Power supply:** Yoke Mounted
- **Mains Input:** IEC, 100-240 Vac / 50-60 Hz
- **IP Rating:** IP20
- **Mobile power options** [not included]:
 - Gemini 1x1 14.4V Battery Plate (fits to yoke or directly on fixture)
 - Dual Battery Bracket with XLR Cable

DIMENSIONS

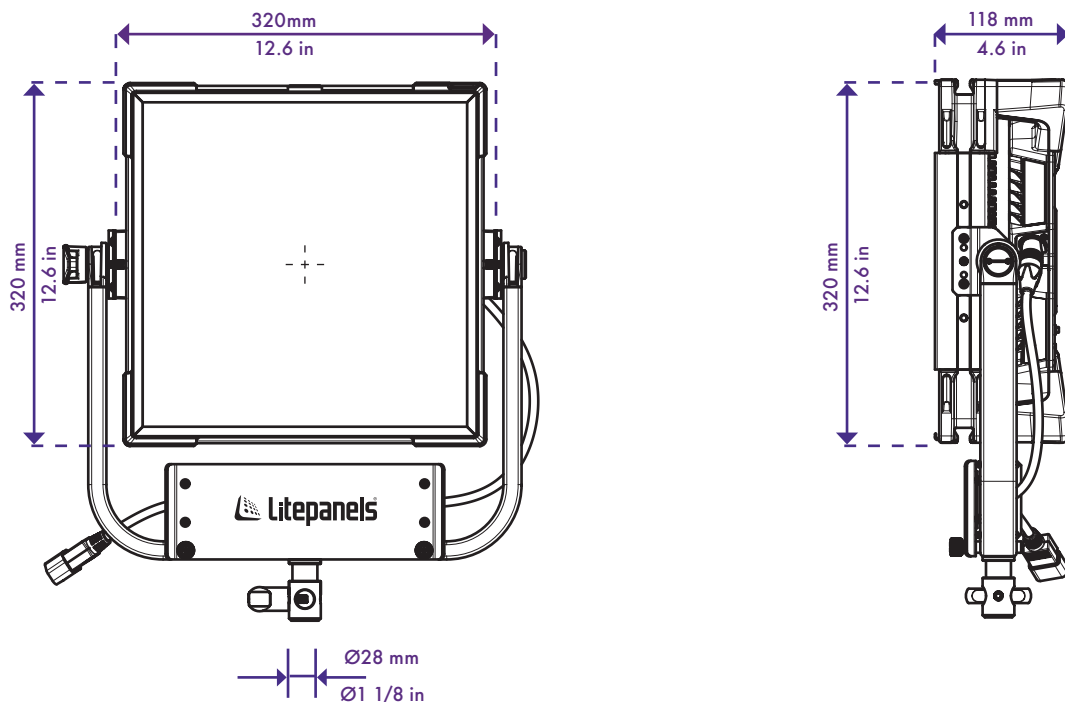



900-3509

Fixture Cover for
Astra and Gemini 1x1



900-3521

Light carry case for
(1) Astra or
(1) Gemini 1x1



900-3522

Light carry case for
(2) Astra's or
(2) Gemini 1x1's



900-3714

Hard Case Gemini 1x1




900-3715

Traveler Case Trio
for Astra Family and
Gemini 1x1



900-3701

Barn Doors 4 Way
Gemini 1x1



900-3702

Honeycomb 60 Deg,
Gemini 1x1



900-3722

Snapbag Softbox
Gemini 1x1 Hard with
removable baffle



900-3717

Snapgrid 40 deg Eggcrate
for Gemini 1x1 Fixture



900-3720

Snapgrid 40 deg Eggcrate
for Gemini 1x1 Snapbag



900-3719

Snapbag Cloth set
Gemini 1x1, 1/4, 1/2, Full



900-3703

Battery Plate
Gold-Mount
Gemini 1x1



900-3704

Battery Plate
V-Mount
Gemini 1x1



900-3617

Dual Gold-Mount
Battery Bracket
with XLR-Cable



900-3618

Dual V-Mount
Battery Bracket
with XLR-Cable



8075-0255

26V Gold-Mount Plus
Dual Mounting Plate
with XLR-Cable



908-0001

Bluetooth Dongle



900-3601

Wireless DMX
communications Module



900-3705

Dual Gemini 1x1 Array Kit
with Yoke



900-3706

Quad Gemini 1x1 Array Kit
with Yoke