
VELVET MINI SERIES ALL-WEATHER RUGGED PANELS POWERFUL and VERSATILE







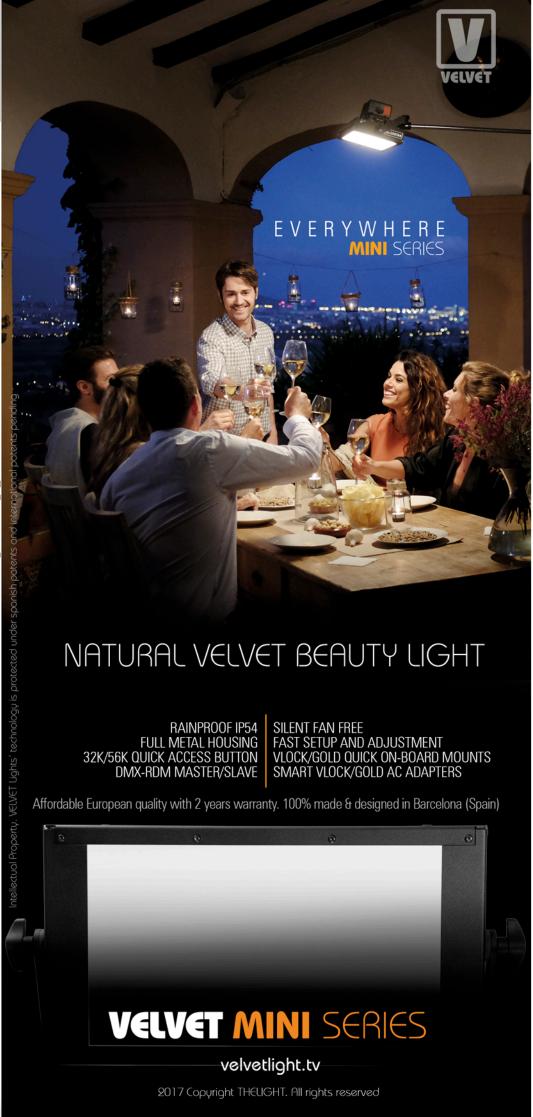

VELVET MINI Rainproof Panoramic LED Panels



VELVET MINI 1

Robust, silent, powerful & easy to use under a small & portable housing for Videographers




VELVET QUALITY WHITE LIGHT

VELVET Mini produce a soft, natural beauty light to get perfect skin tones and real colors. Every VELVET MINI panel is designed to be quickly installed, hidden, rigged up or








VELVET MINI 2

Rainproof rugged and portable light panels, designed for instant setup and adjustment



PANORAMIC & PORTABLE

VELVET MINI are slim and long to wraparound, to be easily hidden on low ceiling locations or studios and to perfectly light any panoramic framing.

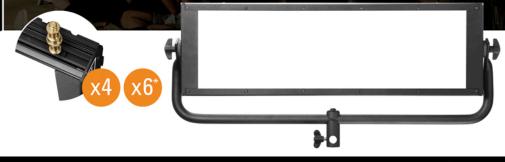

VELVET MINI 3

Naturally soft and wraparound quality light to easily get beauty shots and natural portraits



NATURAL SOFT LIGHT, MADE TO LAST

100% aluminum body. Robust and rainproof IP54 (VELVET MINI LOCATION) made to endure the tougher shooting conditions on any location or studio.



Includes two handles to easily hand-held and a removable yoke with 16mm baby

Accesories: Foldable SnapGrid & SnapBag, barn doors, VELVET remote control through

Several sliding 1/4" threads for rigging on top and bottom

QUICK SETUP

- On-board shock resistant digital display + dedicated 32K/56K quick-access button
- Silent, absolutely fan-free operation with efficient passive cooling
- Integrated single XLR-5 DMX (except VELVET MINI 1 Standard)
- Color temperature adjustable from 2700K to 6500K in 100K increments. Dimmable 0 to 100% (Smooth & flicker-free up to 1000 fps)

- Smart Vlock or Gold AC adapter 90-264 VAC

PHOTOMETRICS 2300 lux / 213 fc at 1 meter / 3 feet 300 lux / 28 fc at 3 meters / 10 feet

- Ready to operate with any battery 12-35 VDC through XLR3 (MINI 2 & 3)
- STUDIO versions with integrated power supply into the low profile housing

SMART AD/DC POWERED

- On-board removable quick link Vlock/Gold battery mount (MINI 2 & 3)



345 x 190 x 90 / 13,6 x 7,5 x 3,5"
1,9 Kg / 4,2 lbs
50W / 0,45 Ah at 110 VAC
12-35 VDC through Vlock battery plate. Smart Vlock AC Power adapter 90-264 VAC 50/60 Hz
Integrated internal PSU (VELVET MINI 1 STUDIO)

PHOTOMETRICS 1200 lux / 111 fc at 1 meter / 3 feet 150 lux / 14 fc at 3 meters / 10 feet





VELVET MINI

READY TO RIG

receiver / 28mm junior pin

XLR5, cordura case, hard case.

870 x 190 x 90 / 34 x 7,5 x 3,5"
4,3 Kg / 9,5 lbs
150W / 1,36 Ah at 110 VAC
Vlock or Gold battery quick link mount 90-264 VAC 50/60 Hz through Smart Vlock AC Power adapter
Integrated internal PSU (VELVET MINI 3 STUDIO)

PHOTOMETRICS 3200 lux / 296 fc at 1 meter / 3 feet 450 lux / 42 fc at 3 meters / 10 feet

VELVET MINI