



DIN RAIL

TRAILING EDGE Dimmers


DMR.745

Economic solution for controlling:

- Dimmable LED Lamps
- Dimmable LED Drivers
- Dimmable Incandescent & Halogen 240V Lamps
- Dimmable Electronic Transformers

Features

- DALI-2 DT6 device.
- Digital numeric display.
- Automatic addressing via DALI master or manually through digital display.
- Adjustable DALI address quantity from 1 to 4.
- 1 to 4 independent output channels.
- Adjustable minimum level.
- Easily fastened to DIN (EN 60715) RAIL.

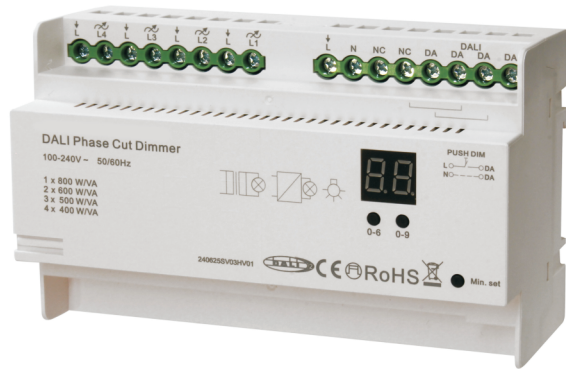

Code	Power Supply	Power Output*	Dimming Method	Output Channels	Control
DMR.745	100-240VAC / 50-60Hz	Refer to the table below	Trailing Edge	1-4	DALI-2, Push Button(s)

Maximum dimmer loads*

Load Type	Maximum Load
Dimmable LED lamps, Dimmable LED drivers, Electronic Transformers	1*200W @ 110V, 1*400W @ 230V
	2*150W @ 110V, 2*300W @ 230V
	3*125W @ 110V, 3*250W @ 230V
	4*100W @ 110V, 4*200W @ 230V
Incandescent lighting, Halogen 240V lamps	1*400W @ 110V, 1*800W @ 230V
	2*300W @ 110V, 2*600W @ 230V
	3*250W @ 110V, 3*500W @ 230V
	4*200W @ 110V, 4*400W @ 230V

