

 Mini PAGlink™

PAG 



**MORE POWER FOR CAMERAS,
ACCESSORIES & PERSONAL DEVICES**



MPL150

- More power for broadcast and cinema cameras, accessories and personal devices.
- All the benefits of PAGlink intelligent linking technology combined with an increased individual capacity of 150Wh for longer run-time.
- Built-in outputs: USB-C (5, 9, or 12V, 30W), USB-A (5V 2.4A) and D-Tap (12V unregulated). A USB-C output unit (PD 36W) which can be swapped for a Lemo, Hirose or 2.1 - 2.5mm by the user (available separately).
- Compatible for linked discharge or charging with Mini PAGlink batteries of any rated capacity or state of charge.
- Link 2 x MPL150 to create a 300Wh battery, or 3 for 450Wh. Increase the current draw capability from 10A to 12A and hot-swap for continuous running.
- New handling and protection features designed to endure the toughest working conditions.

The MPL150 gives you all this and more...

- Flight-friendly capacity - two 150Wh batteries are included in your personal flight allowance.
- PAG's patented linking technology - which is far in advance of any other camera battery system available today.
- Simultaneous discharge from linked batteries, which means no dead weight on your camera.
- An increased current draw, from 10A individually to 12A when batteries are linked; ideal for camera set-ups that require power for multiple accessories.
- An extended overall battery life, with a 2 year warranty, providing a better return on investment, because linked batteries share the load.
- Seamless hot-swapping for continuous power, or the ability to add another battery just to keep running.
- Cells used by NASA and found to have the best capacity retention after 500 cycles.
- Efficient, linked battery charging - up to 10 batteries on each position, using PAGlink or other manufacturers chargers.
- Rubber, non-slip side panels for safer handling.
- An accurate, numeric display which shows run-time on-load in 1 minute increments; charge status any time in 1% increments; and useful data such as number of charge/discharge cycles to assist with battery management.
- Auto-communication with camera data systems that display charge status in the viewfinder/LCD.
- 1/4" bushes for mounting accessories.
- Modular construction that allows authorised replacement of the cell-pack, whilst retaining air safety credentials.
- Case parts and electronic modules that can be reused for greater sustainability and a more economic replacement.




**300WH YOU
CAN FLY WITH!**

MPL150 BATTERY SPECIFICATIONS:

Model No.	8342 V-Mount	7342 Gold Mount
Capacity / Voltage:	150 Watt-hours (10 Ampere-hours) / 14.8V nominal	
Output Current:	12A linked / 10A individually	
Fixed Outputs:	USB-C (5, 9 or 12V, 30W) USB-A (5V 2.4A), D-TAP (12V unregulated)	
Swappable Output:	USB-C (PD 36W). Swap for Hirose (4-pin), Lemo (2-pin), or 2.1-2.5mm	
Weight:	850g approx.	

Dimensions:

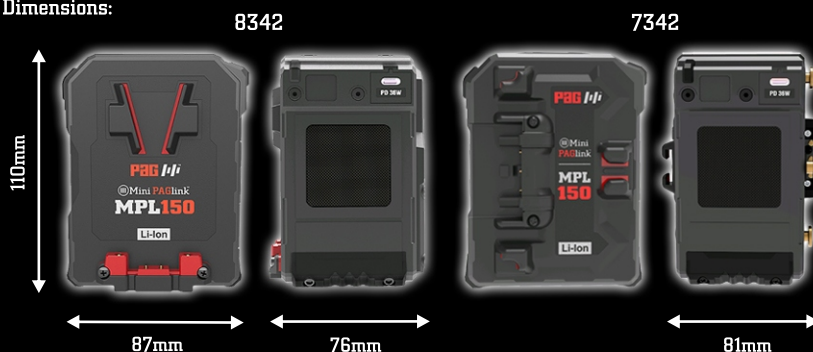

Size Comparison:



PAG reserves the right to change the specifications contained herein without notice.

© Copyright PAG Ltd. AUG 2024



www.paguk.com

EUROPE, UK & MIDDLE EAST

Aspectra, NL, +31 10 514 0680, info@aspectra.nl

THE AMERICAS

PAG America, +1 631 300 8215, sales@pagamerica.com

REST OF THE WORLD

PAG Ltd. UK, +44 (0)20 8543 3131, sales@paguk.com